





BT/CAT/ISO25, HSK32A
BT/CAT/ISO30, HSK50E
BT/CAT/ISO40, HSK63A

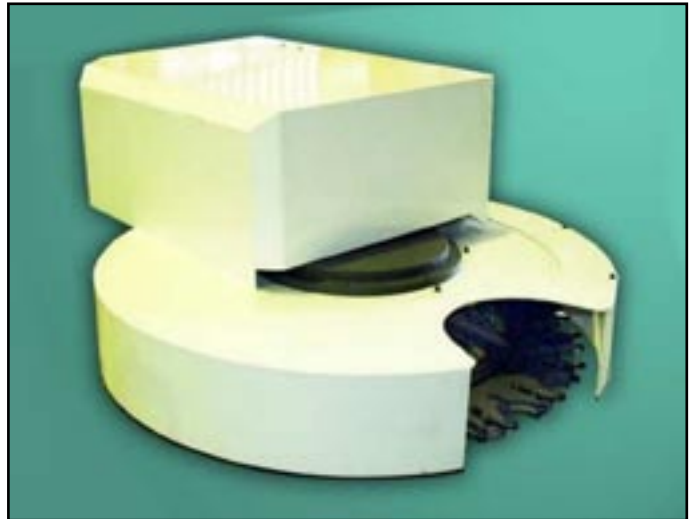

BT/CAT/ISO40, HSK50E, HSK63A

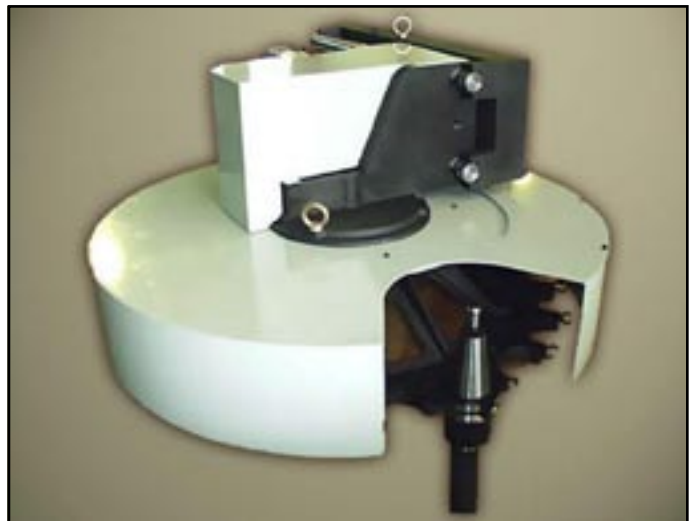

BT/CAT/ISO50, HSK100A

Specifications

Taper:	1) BT/CAT/ISO25, HSK32A HSK100A 2) BT/CAT/ISO30, HSK50E 3) BT/CAT/ISO40, HSK63A	BT/CAT/ISO40, HSK50E, HSK63A BT/CAT/ISO50, HSK100A
---------------	--	--

Drive System	Geneva Driven System	Cam Driven System	Cam Driven System
Tool Capacity	1) 8, 10, 12 2) 8, 10 3) 8, 10	16, 20, 24	16, 20
Power Supply of Magazine	Electric	Electric	Electric
Tool Index Time	0.55 Sec./60Hz	0.55 Sec./60Hz	0.55 Sec./60Hz
Cycle of Cylinder Stroke	2 ~ 4 Sec.	2 ~ 4 Sec.	2 ~ 4 Sec.
Maximum Tool Weight	5.0kg	250mm	300mm
Maximum Tool Diameter	85mm	8.0kg	15.0kg
(All Pots Full)		124mm	124mm